WC-J6-J11

J6 12" Pigtail & J11 180" Pigtail for Whelen CenCom Core C399

© AFS 2021

Whelen CenCom Core C399

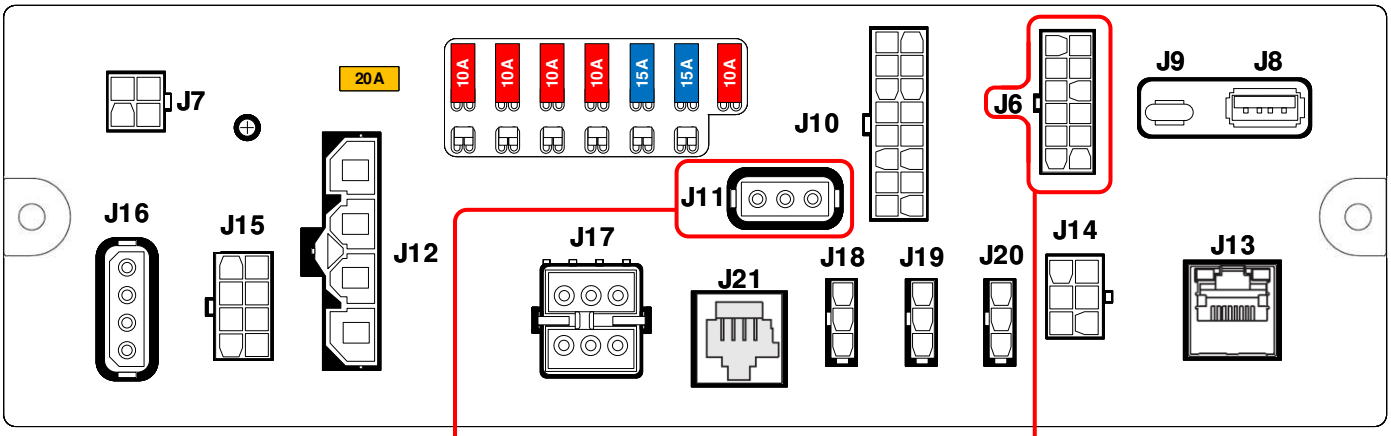

J11 – RELAY

J6 – INPUTS

J11

J11 – RELAY – 180"

- J11-1 18 Ga. White Jumper to J6-1 – Core Normally Open
- J11-2 18 Ga. White COMMON – Core Common
- J11-3 18 Ga. White NC – Core Normally Closed

J6

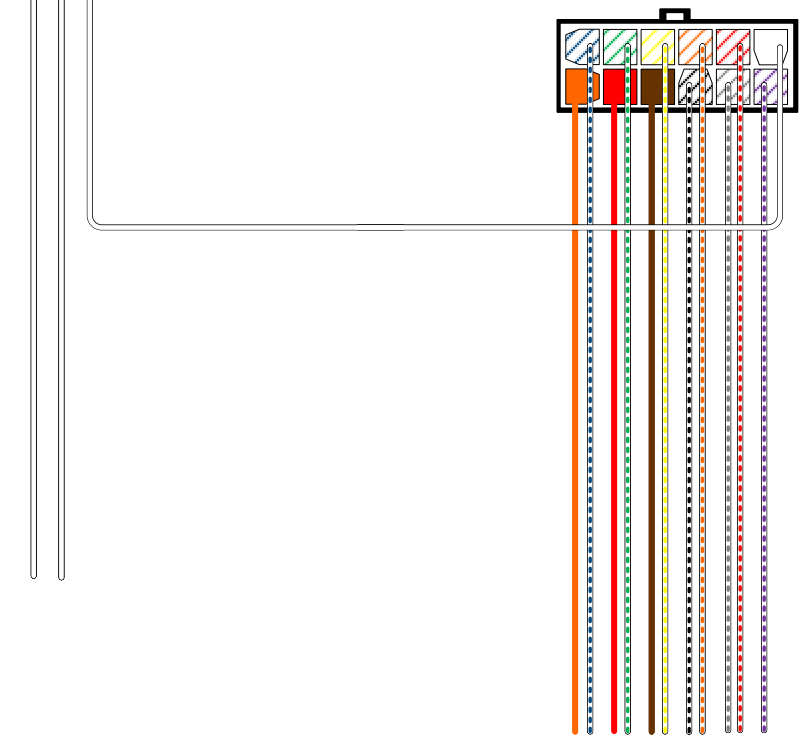

J6 – INPUTS – 12"

- J6-1 18 Ga. White Jumper to J11-1 – Core Input 1
- J6-2 18 Ga. White/Red J6-2 IN 2 – Core Input 2
- J6-3 18 Ga. White/Orange J6-3 IN 3 – Core Input 3
- J6-4 18 Ga. White/Yellow J6-4 IN 4 – Core Input 4
- J6-5 18 Ga. White/Green J6-5 IN 5 – Core Input 5
- J6-6 18 Ga. White/Blue J6-6 IN 6 – Core Input 6
- J6-7 18 Ga. White/Purple J6-7 IN 7 – Core Input 7
- J6-8 18 Ga. White/Gray J6-8 IN 8 – Core Input 8
- J6-9 18 Ga. White/Black J6-9 IN 9 – Core Input 9
- J6-10 18 Ga. Brown J6-10 IN 10 – Core Input 10
- J6-11 18 Ga. Red J6-11 IN 11 – Core Input 11
- J6-12 18 Ga. Orange J6-12 IN 12 – Core Input 12

EDD 020121 ECN 000000

TECHNICAL SUPPORT & SALES CONTACT:

Phone: 844-423-7200
Email: Sales@AllFleetSolutions.com
Web: www. AllFleetSolutions.com