
CTF-T12-FLEX

12-CIRCUIT CONFIGURABLE VOLTAGE MONITORING TIMER


The CTF-T12-FLEX is built for law enforcement, fire and EMS, utility, municipal, and commercial service vehicles running mobile computers, radios, routers, cameras, and other communication equipment. Its field-configurable outputs let agencies standardize vehicle builds while accommodating different equipment packages. It can serve as a complete vehicle low-voltage disconnect on its own, or pair with the PDD-B12I2D6 to support patrol vehicles with intelligent light and siren controllers.

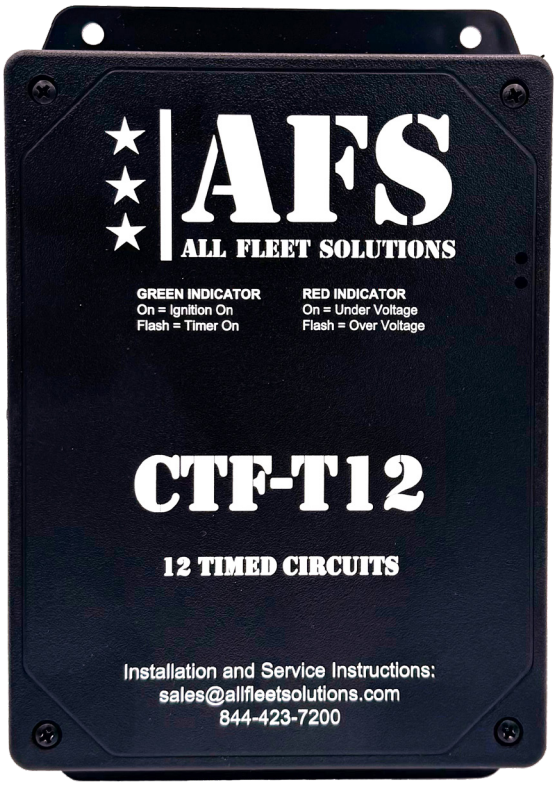

PRODUCT FEATURES:

The CTF-T12-FLEX provides 12 fused outputs in two flex zones of six circuits each, and each zone can be set for timed or ignition power. It supports up to 120 amps of total load and includes a two-stud ground bus. An integrated timer offers 16 timed intervals, Infinite Mode, low-voltage disconnect, and diagnostic LEDs to protect the battery and simplify troubleshooting. A momentary input instantly activates two-way radios, even when the vehicle is off, and a reset function restarts onboard IT devices without cycling vehicle power.



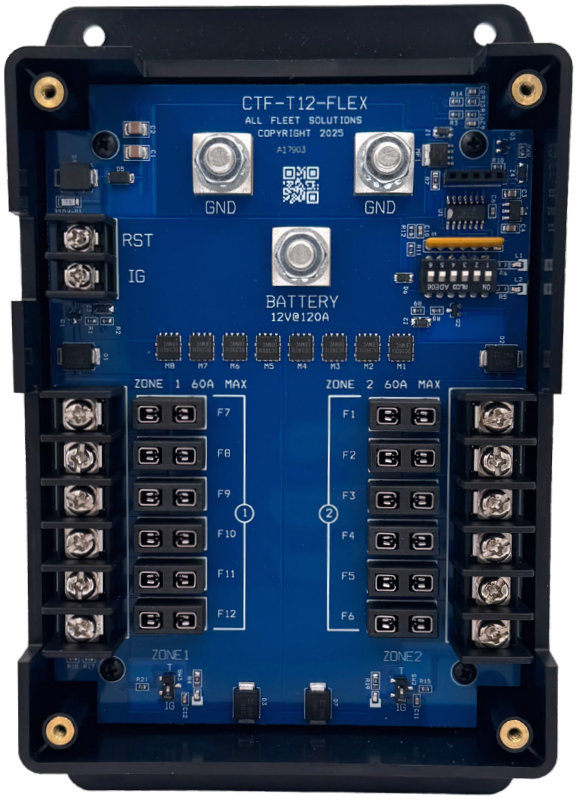

SPECIFICATIONS:

- 12 Fused Outputs
- 2 Flex Zones with 6 Fused Outputs Each
- Flex Zones are field-programmable to Timed or Ignition circuits
- 120A Max Total Load, and 30A max per terminal
- Integrated Voltage Sensing Delay Timer
- 16 Timed Intervals and Infinite Mode
- Low-Voltage Disconnect at 11.00 or 11.75 VDC
- Reset Function
- Instant Activation & Ignition Override
- Diagnostic LEDs
- Accepts 8 to 2 AWG main power and ground wires
- 2-Stud Ground Bus, 2 Rings per M6 Stud, 120A Max
- Dimensions: L 6.1”, W 4.6”, H 1.2”
- Weight: 0.87 lbs.
- All Fleet Solutions reserves the right to upgrade and improve products without notice.

TECHNICAL SUPPORT & SALES CONTACT:

Phone: 844-423-7200
Email: sales@allfleetsolutions.com
Web: www.allfleetsolutions.com

ALL FLEET SOLUTIONS

500 W Bethany Dr., Ste 300
Allen, TX 75013
© 2026 All Fleet Solutions LLC